


NOTES:


Selection of single-lane roundabout circulating carriageway width from Austroads Part 4B: Roundabouts:
 Central Island radius: 8m
 Width required for 25 m B-double design vehicle: 9.4m

PRELIMINARY ESTIMATE:

Detail survey:	10k
Land acquisition:	150k
Fence relocation:	15k
Roundabout design and construction:	430k
Stormwater design, supply and construction:	50k
Utilities relocation:	200k
Pavement linemarking:	30k
Footpath construction:	50k
Road lighting design, supply & construction:	160k
Regulatory and warning signs design, supply & construction:	10k
Landscaping:	70k
Contingency (25%):	150k
TOTAL:	1,325k

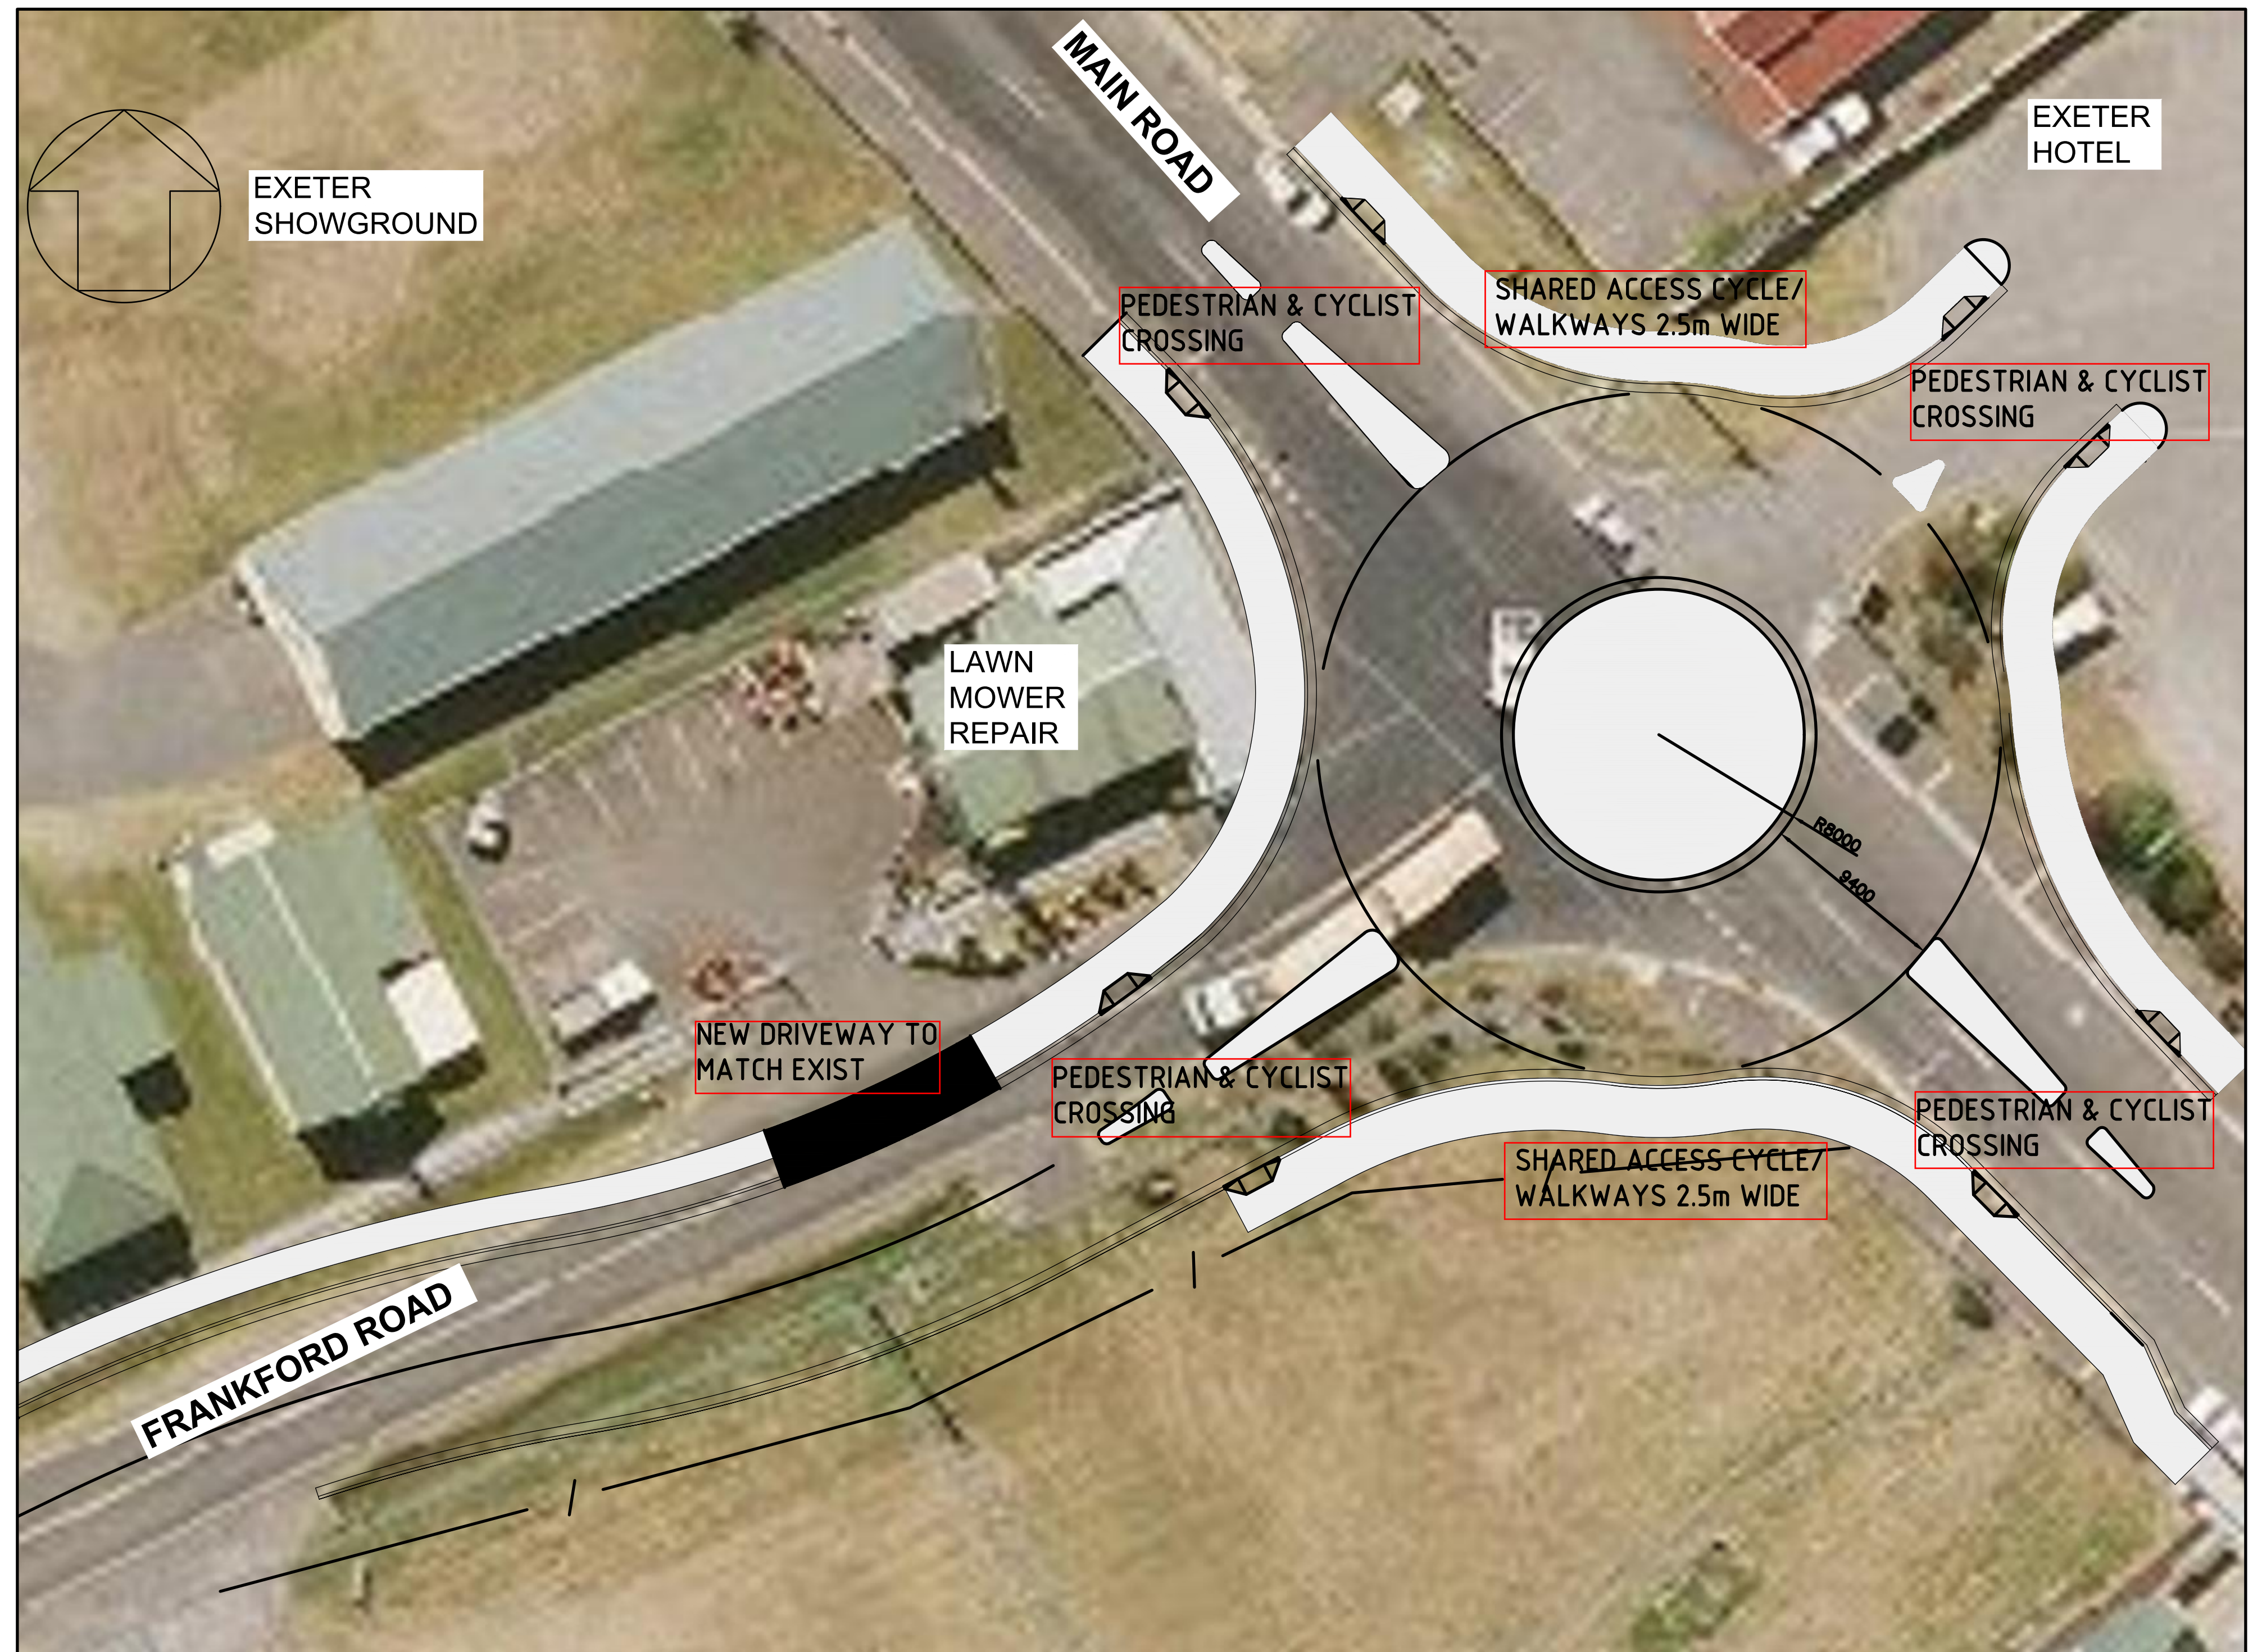

FRANKFORD ROAD / MAIN ROAD ROUNDABOUT PLAN

			DO NOT SCALE			SCALE: 1:200 ON A1	JOB No.: -	PROJECT: EXETER, FRANKFORD ROAD ROUNDABOUT
3	FOOTPATHS ALTERED	TWP	04/04/19	<small>WARNING: THE LOCATION OF SERVICES ARE APPROXIMATE ONLY. IT IS THE CONTRACTOR'S RESPONSIBILITY TO LOCATE ALL SERVICES AND CHECK SERVICE SIZES PRIOR TO COMMENCEMENT OF WORK. NO GUARANTEE IS GIVEN THAT ALL SERVICES ARE SHOWN.</small>		SURVEY BY: WTC	DESIGNED: ME	DRAWING: CONCEPT PLAN
2	ISSUED FOR COMMENT	TWP	28/03/19		<small>P.O.Box 59 West Street, Beaconsfield Tasmania 7270 Ph: (03) 6323 9300 Fax: (03) 6323 9349 Email: wtc@wtc.tas.gov.au</small>	DRAWN: TWP	CAD FILE: Roundabouts	DRAWING No: A1 SK02
REV.	AMENDMENTS	BY	DATE		APPROVED:	DATE:		REV: 3